

cuTex

VELCRO® TAPE ROUND & STRAIGHT CUTTER

MODEL

TBC-52RT



WITH BUTTON SWITCHING, YOU CAN CUT ROUND VELCRO® TAPE AUTOMATICALLY.

VELCRO® tape can be cut round or straight at range of 5mm~9,999mm long.

■ SPECIAL FEATURES

- High speed : It can cut 70~90 cuts per minute.(50mm long)
- Accuracy : Cut-length is accurate owing to using a stepping motor.
- Choice : By changing mold, round or straight cutting is available.
- Cutting type : Cutting is neat due to using a cold cutter like scissors and blades are durable because they are made of high-speed steel(HSS).
- Automatic operation : It works automatically only by setting length and quantity.
- Automatic stopper : It stops automatically if materials run out during operation.
- Memory : Set-length, set-q'ty & set-speed are not erased even if power off & on.




TAEWOO CO., LTD.

EASY TO USE & COMPACT DESIGN **cuTex**

■MODEL


TBC-52RT

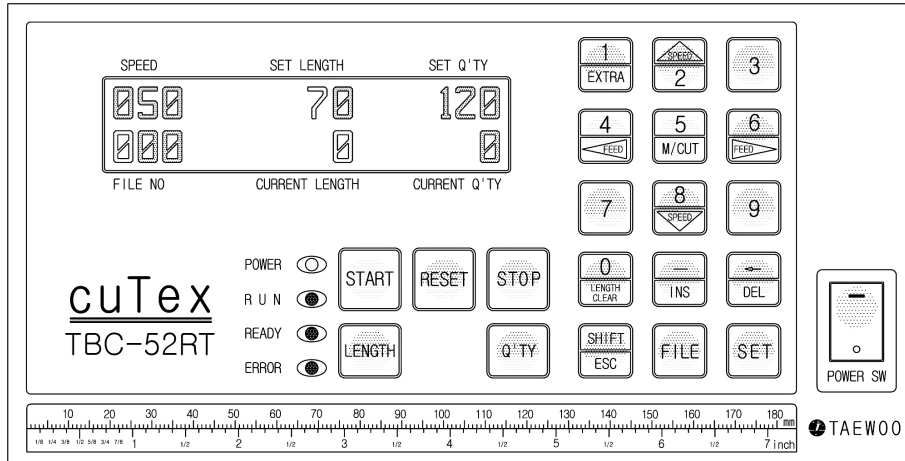

⊠ OPERATION

- LENGTH button + set-length + SET button
- Q'TY button + set-q'ty + SET button
- START button → operation

※ Example : Length 70mm, Q'ty 120 cuts

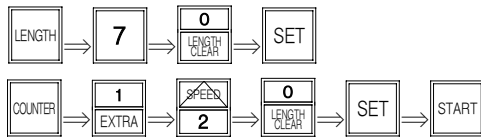

⊠ KEY BOARD FUNCTION


- **5** (MICUT) Manual cutting, or to take out jammed material in knife blades, or to fit blades in exchange of knife.
- **4** (FEED) and **6** (FEED) to move the roller forwards or backwards.
- **2** (SPEED) and **8** (SPEED) to be the cutting speed up or down manually.
- **LENGTH CLEAR** to make the current length zero for operation.
- **RESET** to delete the current length and the current quantity.
- **1** (EXTRA) to cut additional one.

⊠ AVAILABLE MATERIALS

- VELCTRO[®] tape (round or straight shape)

⊠ SPECIFICATIONS

- CUTTING KNIFE : Cold
- CUTTING WIDTH(Radius & range) :



- A. Straight cutting(flat knife) : 0~90mm
- B. Normal round(single mold): R=3, 9mm~38mm
- C. Normal round(double mold): R=3, 9mm~30mm
- D. Oval type(single mold): 12mm~30mm
- E. Half-circle(single mold): 12mm~30mm
- F. Right circle(single mold): 8mm~30mm



- CUTTING LENGTH : 5mm~99,999mm
- CUTTING SPEED : 70~90cuts/min.
- POWER SUPPLY : AC110/220V, 50/60Hz
- MACHINE/N.WT : 800×320×380/22.7kg
- PACKING/G.WT : 535×430×340/26.2kg

TAEWOO CO., LTD.

A-302, 1025-1 DOGOK-RI, WABU-EUP,
 NAMYANGJOO, KYONGGI-DO, KOREA
 TEL : +82 31 521 6904~7, FAX : +82 31 521 6908
 www.taewoocutex.com cutex@chollian.net

■ AGENT: